


# S4 15

## 4" SUBMERSIBLE ELECTRIC PUMPS

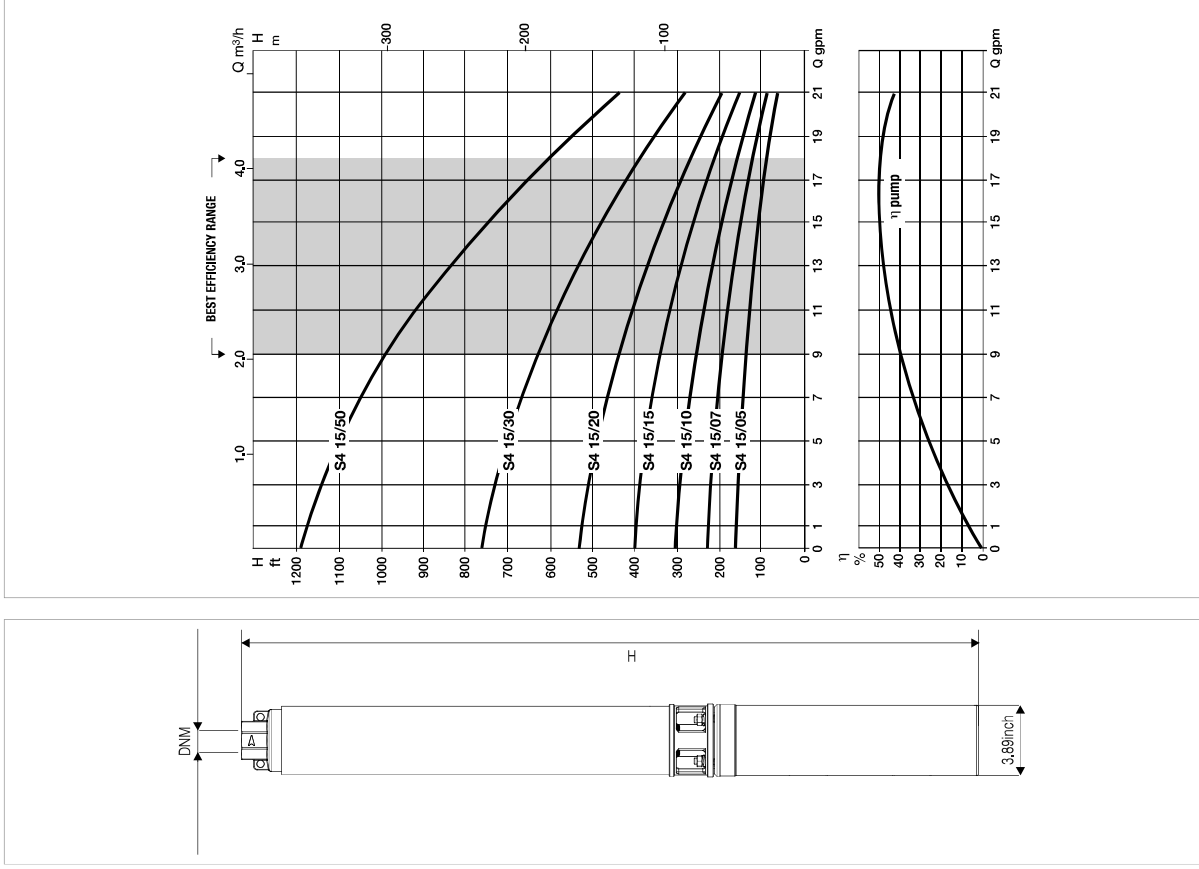

Curve tolerance according to ISO 9906

# S4 15

## 4" SUBMERSIBLE ELECTRIC PUMPS

### ELECTRICAL DATA AND DIMENSIONS

MODEL	P2 hp	STAGES	LEIGHT inch	GROSS WEIGHT lbs	DISCHARGE SIZE npt	ASSEMBLED VERSION	MOTOR TYPE	VOLTAGE
S4 15/05	0.5	5	13.7	6.0	1"1/4	YES*	NOMOTOR	-
			27.1	27.2			4IN2W	115
			24.2	25.4			4653W	-
			27.0	27.0			4IN2W	230
S4 15/07	0.75	7	24.2	25.4	1"1/4	YES*	4653W	-
			15.9	6.6			NOMOTOR	-
			25.7	25.9			4IN2W	230
			27.1	28.0			4653W	-
S4 15/10	1	9	16.1	7.5	1"1/4	YES*	NOMOTOR	-
			34.8	36.2			4IN2W	230
			37.7	35.4			4653W	-
			21.4	8.6			NOMOTOR	-
S4 15/15	1.5	12	33.9	41.2	1"1/4	YES*	4IN2W	230
			36.8	41.0			4653W	-
			25.7	10.4			NOMOTOR	-
			33.4	14.1			NOMOTOR	-
S4 15/20	3	23	33.4	14.1	1"1/4	YES*	NOMOTOR	-
			42.8	20.5			NOMOTOR	-

\* assembled version available with camera: mbr-46G and 4TW

PUMP MODEL	HP	Depth to pumping water in feet																Shut-off (ft)										
		20	40	60	80	100	120	140	160	180	200	240	280	300	360	400	480		500	600	700	800	900	1000	1100	1200		
S4 15/05	1/2	0	21	19	16	13	9																				163	
		46	18	15	11	7																						
		69	17	14	10	5																						
		139	16	14	10	5																						
S4 15/07	3/4	0	33	45	36	27	19	10	13	11	8																229	
		46	19	17	15	12	10	5																				
		69	19	17	15	12	10	5																				
		139	18	15	12	10	5																					
S4 15/10	1	0	82	73	64	56	47	35	30	21	12																99	
		46	19	18	16	14	10	8																				
		69	19	18	16	14	10	8																				
		139	18	15	12	10	8	5																				
S4 15/15	1.5	0	122	113	104	96	87	76	61	50	44	26	16														190	
		46	21	20	19	18	17	15	13	12	7	6																
		69	21	20	19	18	16	15	14	11	9	5																
		139	21	20	19	18	16	15	14	13	9	5																
S4 15/20	2	0	183	174	165	156	145	138	131	122	113	105	96	87	70	61	44	18									401	
		46	20	19	18	17	16	15	13	12	10	8	3															
		69	20	19	18	17	16	15	13	12	10	8	3															
		139	20	19	18	17	16	15	13	12	10	8	3															
S4 15/30	3	0	221	212	204	195	187	178	169	159	150	141	132	123	114	105	96	87	74	57	72	13					280	
		46	21	20	19	18	17	16	15	13	12	10	8	3														
		69	21	20	19	18	17	16	15	13	12	10	8	3														
		139	21	20	19	18	17	16	15	13	12	10	8	3														
S4 15/50	5	0	327	313	304	296	287	278	270	261	252	244	236	228	219	210	201	192	183	174	165	156	147	138	129	120	330	
		46	21	20	19	18	17	16	15	13	12	10	8	3														
		69	21	20	19	18	17	16	15	13	12	10	8	3														
		139	21	20	19	18	17	16	15	13	12	10	8	3														

NOTE: performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.